


# CUSTOMER DRAWING

| REVISIONS |          | DATE        | APPROVED           |
|-----------|----------|-------------|--------------------|
| SYM       | ECON No. | DESCRIPTION | 11/27/2006<br>Joan |
| AX1       |          |             |                    |

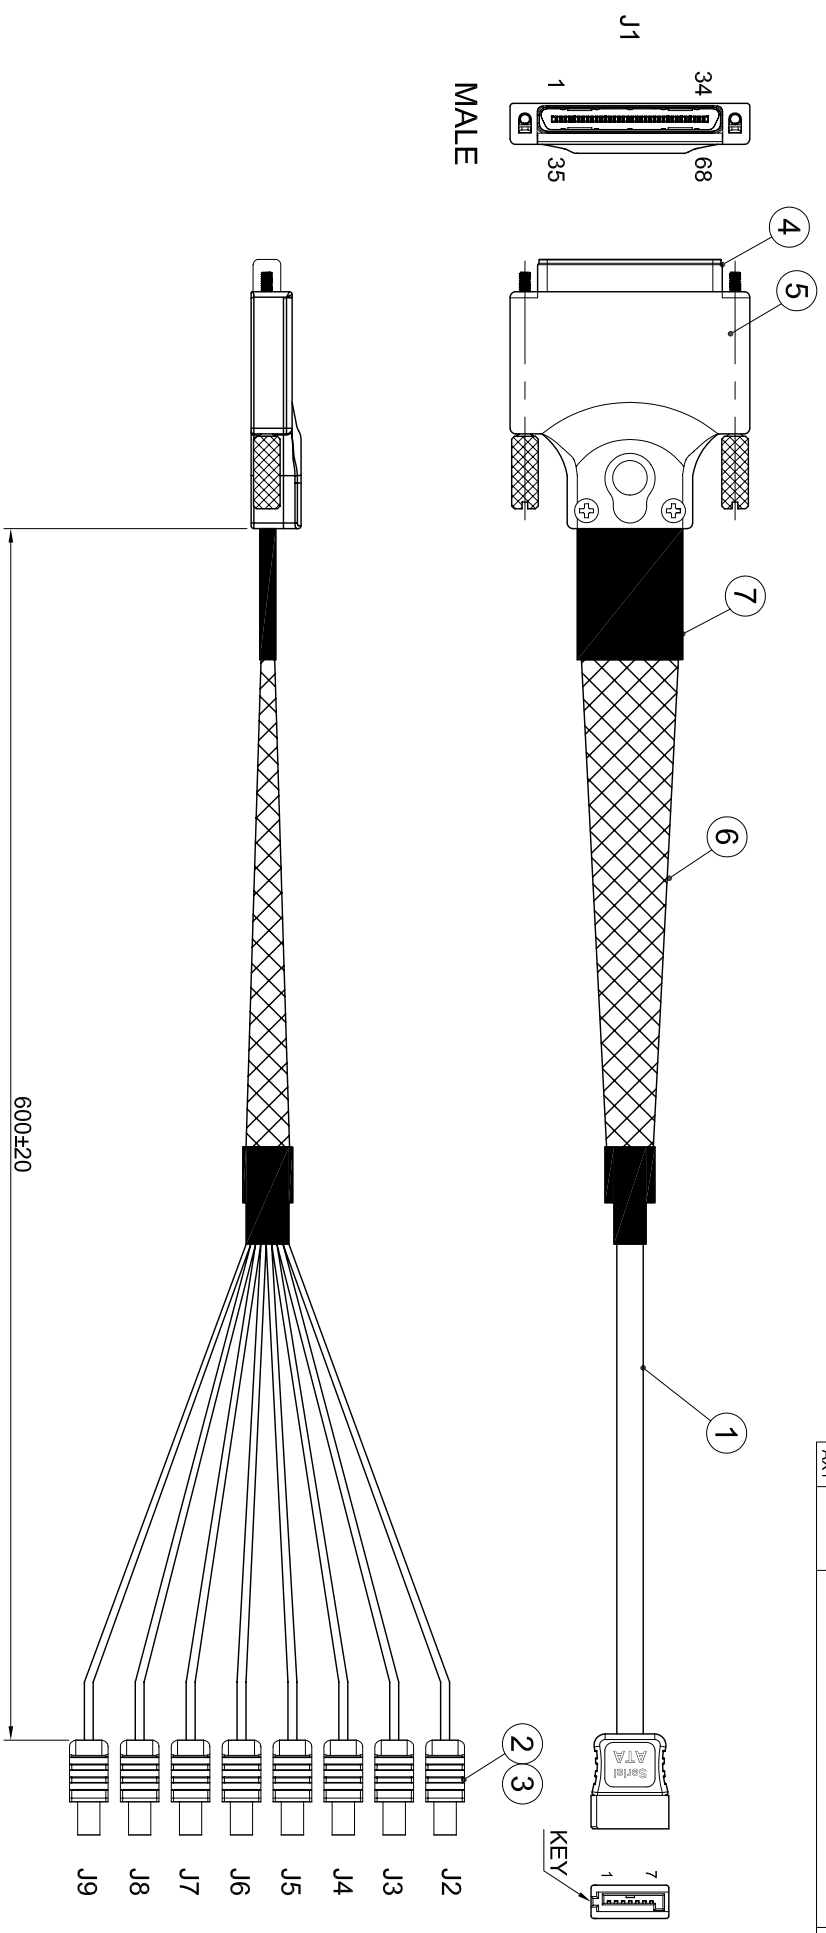

|      |                  |   |      |                            |                          |            |  |
|------|------------------|---|------|----------------------------|--------------------------|------------|--|
| 7    | T731XXXXXXXXXXXX | HEAT SHRINK TUBE                                      | 2    | TOLERANCE UNIT (mm)        | APPROVALS                | DATE       |  |
| 6    | T734XXXXXXXXXXXX | PLASTIC BRAID   | 1    | X.                         | DRAWN<br>Joan            | 11/27/2006 | <b>TC&amp;C Electronic Co., Ltd</b><br><br>VHDCI CONN. 68-POS PLUG TO SATA 7P*8<br><br>TITLE<br><br>SCALE N.A.<br>SHEET 1 OF 2<br>PART NO. T107045680601<br>CUSTOMER CODE T107045680601-AX1<br>DRAWING NO. T107045680601-AX1<br>REV. AX1 |
| 5    |                  | HOOD, ZINC ALLOY                                      | 1    | X.X                        | CHECKED<br>Johnson Chen  | 11/27/2006 |  |
| 4    |                  | VHDCI CONN. 68-POS PLUG 0.8PITCH, SOLDERING TYPE, 15" | 1    | X.XX                       | APPROVED<br>Johnson Chen | 11/27/2006 |  |
| 3    | TT00101020601XX  | PVC BLACK 45P, FOR OVERMOLD CABLE                     | G    | X.XXX                      |                          |            |  |
| 2    | TS04871216230N6  | SERIAL ATA 7P CONNECTOR RECEPTACLE 1800%#             | 8    | ANGULAR ±2°                |                          |            |  |
| 1    | T60-IG-A317      | SERIAL CABLE UL2725 4PRS (#30+1PRS+SHIELD)X2F, GRAY   | A/R  | UNLESS OTHERWISE SPECIFIED |                          |            |  |
| ITEM | PART NUMBER      | DESCRIPTION   | Q'TY |                            |                          |            |  |