
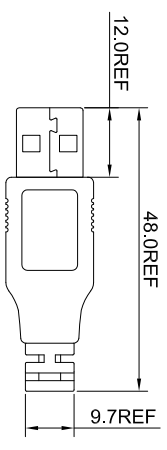


PART	INNER MOLD NO.	OUTER MOLD NO.
J1		
J2		

CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1		NEW	07/04/2009	JOHNSON
AX2		ADD A LENGTH 1.2M	08/08/2009	JOHNSON
AX3		CHANGE WIRING TABLE	09/16/2009	JOHNSON

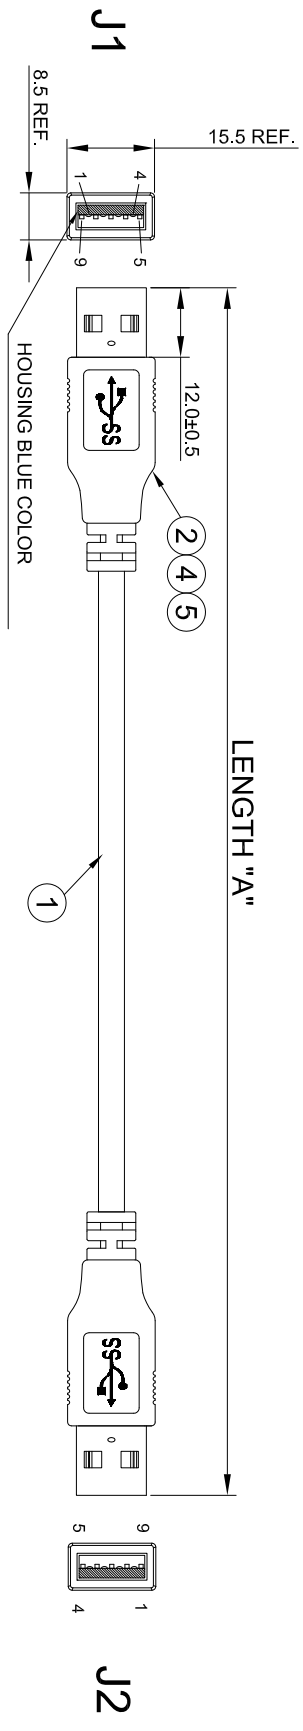

TC&C PART NO.	LENGTH "A"
T10700C8090902-1	1000±50mm
T10700C8090902-2	2000±50mm
T10700C8090902-3	1200±50mm

SIGNAL	COLOR	J1	J2	SIGNAL
VBUS	RED	1	1	VBUS
D -	WHITE	2	2	D -
D +	GREEN	3	3	D +
GND_PWRt	BLACK	4	4	GND_PWRt
SIdA_SSRX-	BLUE	5	8	SIdA_SSTX+
SIdA_SSRX+	YELLOW	6	9	SIdA_SSTX-
GND_DRAIN	DRAIN	7	7	GND_DRAIN
SIdA_SSTX-	PURPLE	8	5	SIdA_SSRX-
SIdA_SSTX+	ORANGE	9	6	SIdA_SSRX+
SHIELD	BRAID	9	9	SHIELD

WIRING TABLE

ITEM	PART NUMBER	DESCRIPTION	QTY	REMARK
5	TT3210150000V/10	HEAT SHRINKABLE TUBE OD/1.5mm BLACK	2PCS	
4	TT0010202010175	OVER MOLDING PVC BLUE 35P	G	
2	TS0C8114030084	USB 3.0 A MALE SOLDER TYPE SHELL PLATING/NI, INSULATE BLUE	2PC	
1	T60-FIC-2496	USB 3.0 (29#*1P+EAM)*2+28*1P+2C+AB BLUE OD=5.4mm	A/R	

TOLERANCE UNIT (mm)	APPROVALS	DATE	TITLE
X, ±0.30	DRAWN JOHNSON	09/16/2009	TC&C Electronics Co., Ltd USB 3.0 A MALE TO MALE
XX, ±0.25	CHECKED JOHNSON	09/16/2009	
XXX, ±0.15	APPROVED JOHNSON	09/16/2009	

SCALE N.A.	PART NO.	DRAWING NO.	REV.
SHEET 1 OF 1	T10700C8090902-X	T10700C8090902-X AX3	AX3